




INEA

Continuous Line 60 System


Slim LED luminaire with direct or direct/indirect light distribution, designed for simplicity and flexibility. Constructed for multiple types of optical systems. Could be mounted as an individual unit or into continuous lines. Luminaire housing made of extruded aluminium profiles. Eloxated high quality finish. Luminaire is designed for suspended or surface mounted installation. Independent control of direct and indirect luminous flux distribution available on request. Lumen output is possible to define individually to suit specific needs of existing application.




Light source	LED
Cooling	PASSIVE
Class	I
Ingress protection	IP20
Weight	3,2-4,4 kg
UGR	< 19

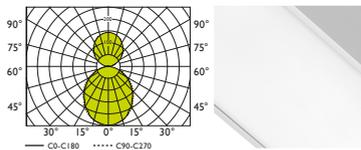

Continuous Line 60 DIR/INDIR DO

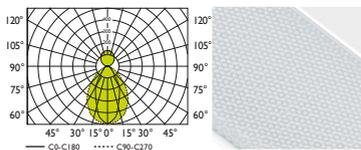

Continuous Line 60 DIR/INDIR DMP

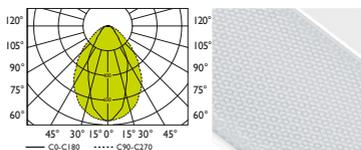

Continuous Line 60 DIR DMP



OPTICAL SYSTEM


- DO - opal diffuser made of polycarbonate
- DMP - microprismatic diffuser made of polycarbonate

ELECTRICAL EQUIPMENT

- LED modules fixed on internal aluminium mounting plate
- electronic LED driver
- terminal block with strain relief, max. 2,5mm²

OPTIONAL EQUIPMENT

- wiring with emergency unit (1 or 3h)
- wiring with dimmable electronic control gear (DSI, DALI)
- white/black colour finish
- continuous mounting
- corner joints
- suspensions
- brackets for wall and surface mounted installation
- transparent supply cable 3 or 5 x 1,5mm²

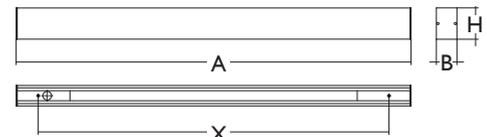

Type*	System power (W)	A/X (mm)	B (mm)	H (mm)	kg
Continuous Line 60 DIR DO 3100lm	31	1126/900	61	93	3,2
Continuous Line 60 DIR DO 3620lm	37	1406/1180	61	93	3,9
Continuous Line 60 DIR/INDIR DO 4820lm	46	1126/900	61	93	3,7
Continuous Line 60 DIR/INDIR DO 5430lm	52	1406/1180	61	93	4,4
Continuous Line 60 DIR DMP 3300lm	31	1126/900	61	93	3,2
Continuous Line 60 DIR DMP 4000lm	37	1406/1180	61	93	3,9
Continuous Line 60 DIR/INDIR DMP 5120lm	46	1126/900	61	93	3,7
Continuous Line 60 DIR/INDIR DMP 5820lm	52	1406/1180	61	93	4,4

*net lumen output of the luminaire by 4000K SPECIFICATION

CODE TYPE

cct	optics	cri	control gear	colour	accessories
2750K	DO	80	ECG	elox	M1h
3000K	DMP	90	DALI	black	M3h
4000K			DIMI-10V	white	
5000K			DSI		
6500K					



haas & schmidt
INTELLIGENT LIGHTING